



Seeburg
Service **Select-o-matic** *Bulletin*

SELECT-O-MATIC "100" LUBRICATION

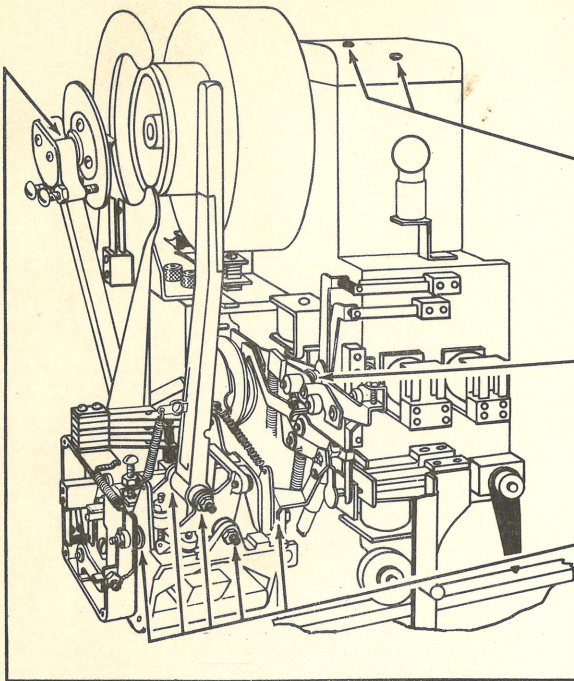

CAUTION: USE OIL VERY SPARINGLY

1. Use SAE #20 Oil in the Gear Box. Fill Oil holes about 3 times, once every 6 months.
2. Use SAE #20 Oil (one drop) on Trip Switch Latch Lever Bearing.
3. Use SAE #20 Oil (one drop) on each Pivot Bearing on the Pickup Assembly.

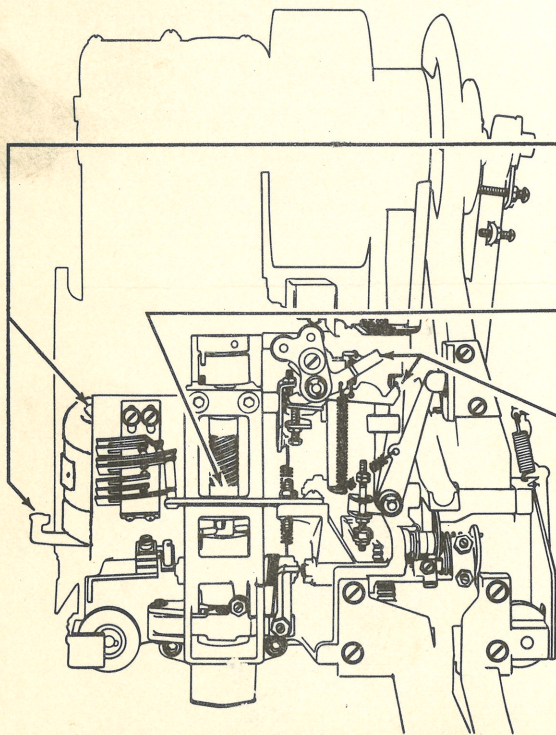

4. Use SAE #20 Oil (one drop) on Pivot Block & Clamp Arm Disc Assembly.
5. Use SAE #20 Oil to saturate top oil pad and to fill lower oil cup on the Motor.
6. Use SAE #20 Oil (one drop) on each moving part of the Clutch Assembly.
7. Use Lubriplate to lightly coat the latching surfaces of Safety Assembly.
8. Use Lubriplate sparingly on all Sliding Surfaces and Pins.

S. H. LYNCH & COMPANY

Dallas, Texas
Houston, Texas

San Antonio, Texas
New Orleans, La.

Memphis, Tenn.
Oklahoma City, Okla.