


LUBRICATION  
OF  
"100" SELECTION WALL-O-MATIC

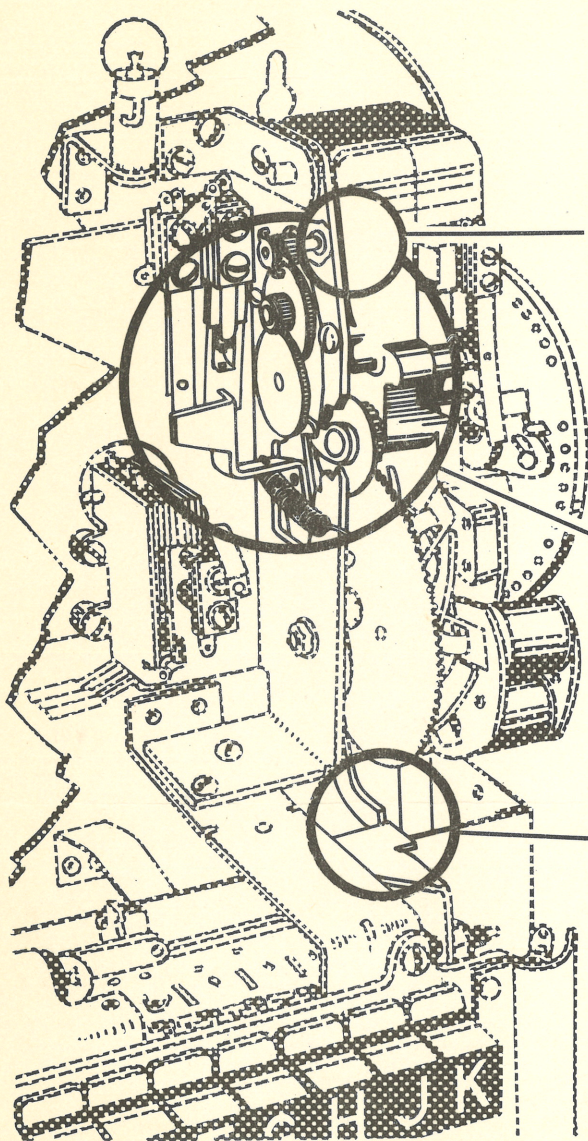

The motor bearings should have one drop of #10 Oil once every six months. It reduces wear to a minimum.

The motor gears should be lubricated lightly every six months with 105 Lubriplate\*.

Sliding surfaces of the latching mechanism should be lubricated with 105 Lubriplate\*.

\*105 Lubriplate may be obtained from the Parts Department of your Distributor.

**S. H. LYNCH & COMPANY**

Dallas, Texas  
Houston, Texas

San Antonio, Texas  
New Orleans, La.

Memphis, Tenn.  
Oklahoma City, Okla.